




# 65TiCO30

## Tile Insert Drain



## Steel Grade 316

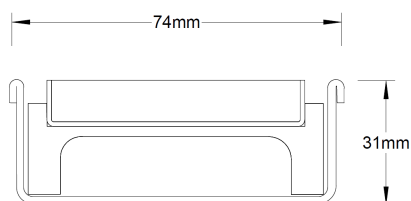

Grates longer than 1500mm supplied in sections. Tile Inserts longer than 1200mm supplied in sections. Channels over 3000mm supplied in sections with joiner. +/-2mm tolerance on dimensions.

**The 65Tii30 is a premium tile insert drain suitable for tiles up to 12mm thick.**


The 65TiiCO30 is a fixed length drainage unit with a centre outlet. The complete drainage unit is full 316 marine grade stainless steel.

**Refer to AS3500 for outlet pipe sizes specific to your installation.**

## SPECIFICATIONS + DIMENSIONS

Channel Width	74mm		
Channel Depth	31mm		
Length(s)	900mm	1000mm	1200mm
Outlet Size	DN50		

## STORMTECH COLOUR FINISHES



Electroplate finishes subject to natural variation with time and local environment. Factors such as pools/surf beaches may require electropolishing. Contact us for suitability.

## PRODUCT APPLICATIONS

Bathroom Drainage  
Aged / Health Care Drainage  
Balcony Drainage  
Courtyard / Patio Drainage  
Pool and Spa Area Drainage  
Hospitality Drainage

- Paved Area Drainage
- Shower Drainage
- Multi-Residential Drainage
- Special Needs Drainage
- Threshold Drainage
- Wet Area Drainage

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.  
Downloaded 04/02/2026 (please check for updates)



Visit **stormtech.com.au**  
for tools + inspiration.

Phone **1300 653 403**

Email **info@stormtech.com.au**