

## Order and Quote Form

# Made-to-Length

## Dual-Sided Shower Screen Support



### Select Grate Style



**AR Architectural**  
2mm wire  
2.5mm gap



**TR Standard**  
3mm wire  
5mm gap



**Ti Tile Insert**  
Tile depth  
up to 10mm



**MND Marc Newson**



**PS Punched Slot**




**PPS Punched Perpendicular Slot**




**PAS Punched Angle Slot**


### Grate + Channel Profiles




AR



TR




Ti



MND, PS, PPS, PAS

### Dual Sided Shower Screen Dimensions

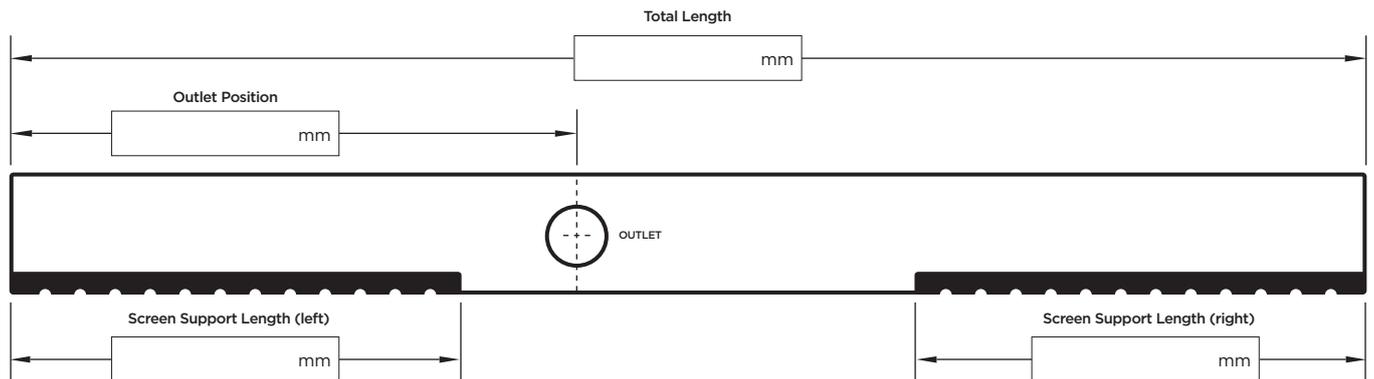 Please include all measurements.


### Required Outlet Size

76mm\*  89mm

\* Only suitable with DN80 riser

### Please Note

See AS3500 standard & local regulator for specific outlet and drainage requirements. Stainless Steel Grade is 316 unless specified. Minimum charge of 1000mm. Grates longer than 1500mm and Tile Inserts longer than 1200mm are supplied in multiple sections. Channels 3000mm maximum in one piece, channels over 3000mm are supplied in multiple sections with joiner. +/- 2mm tolerance on dimensions.

### Full Name

### Company Name

### Telephone

### Email Address

### Order Number

### Stormtech Quote Number

### Signature